


# S5-M

## Socket for 11-pin Relays

<b>Rated Load</b>	<b>16 A / 400 V</b>
<b>Specifications</b>	
Rated impulse withstand voltage	4 kV rms / 1 min
- All terminals / DIN rail	4 kV rms / 1 min
- Terminal / Terminal	4 kV rms / 1 min
Cross-section of connecting wire	
- Single-wire	1 x 6 mm <sup>2</sup> / AWG 10, 2 x 2.5 mm <sup>2</sup> / AWG 14
- Multi wire	1 x 6 mm <sup>2</sup> / AWG 10, 2 x 1.5 mm <sup>2</sup> / AWG 16
Nominal screw torque	1 Nm
Screw dimensions	M3.5 Pozi slot
Mounting	TS-35 or Back Panel Mounting
Ambient temperature operation / storage	-40 ... 60° C / -40 ... 80° C (no ice)
Weight	92g




<b>Integrated Accessories</b>	
A2-Connector	C-A2
Retaining clip, plastic	S5M-CP for C5 / C5x Relays
A1-, B1-Connector	SC-3


<b>Optional Accessories</b>	
Retaining Clip, steel	HF-32 (BAG 10 PCS) for C5 / C5x Relays
A2-Connector	C-A2 (BAG 5 PCS), C-A2 (BAG 50 PCS)
A1-, B1-Connector	SC-3 (BAG 10 PCS)



### Connection diagram

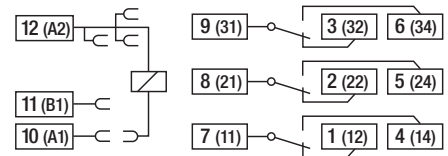

### Dimensions [mm]

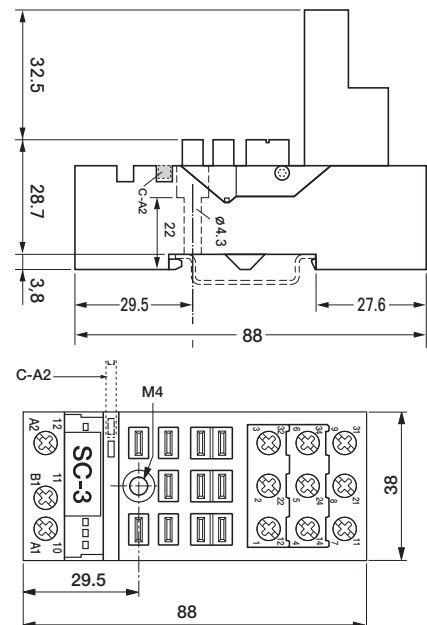

### Technical approvals, conformities

